User Quick Guide (VMU-200)

1.1. Mouse Menu



Figure 1.1. Mouse Menu

Mouse Menu appears when you right-click the mouse.

- Remote Group : shows DVR list and Remote Group list registered in the menu.
- Group Sequence : Connect the remote groups sequentially.
- Matrix : You can see the screen directly by entering the camera number.
- Search USB : Search and playback the video data in the USB Memory in order to check the backup data.
- Menu : enter setup menu.
- Log off : log off the admin account connected currently, locking the system automatically. Password input window will be poped up when you manipulate again. Enter the password for unlocking the system. Default password is 1234.

1.2. Menu

Menu for VMU setup. The detailed setting is possible for system, network, account and information.

1.2.1. System

Figure 1.2. System

1.2.2.1. Remote Group

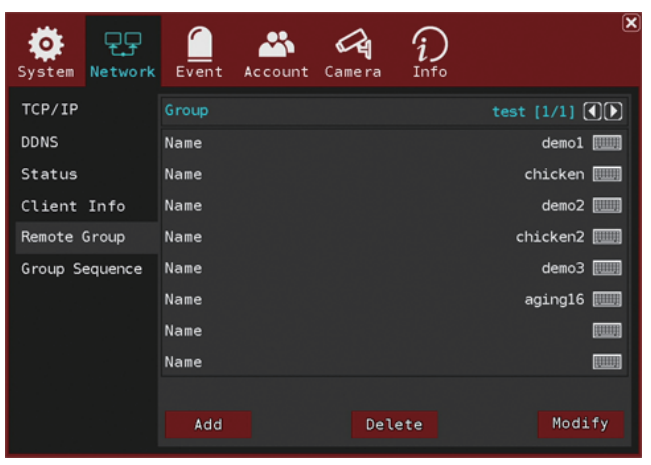

Figure 1.4. Input the information of Remote DVR Group

Add, delete and modify the information of the remote DVR Group that you want to connect.

Input the information of remote DVR you want to connect. Input the information after pressing the Add button.

- Group : the name of remote DVR Group
- Name : the name of remote DVR
- Address : the IP address for remote DVR
- Port : Port number
- User : User ID
- Password : Password

- Name & ID : setup the name of VMU and ID.
- Time & Date : select time and date display method of connected remote DVR.
- Language : select OSD language of the system. Various languages can be selected.
- SW Upgrade : uprade the software of VMU with USB memory. Application Kernel upgrade can be possible.
- Configuration : Factory default, import and export the configuration/setting value of VMU.
- Display : Turn on/off the information on the screen. The name of camera, icon of motion detection recording and status bar can be selected. The resolution of HDMI and VGA can be adjusted.

1.2.2. Network

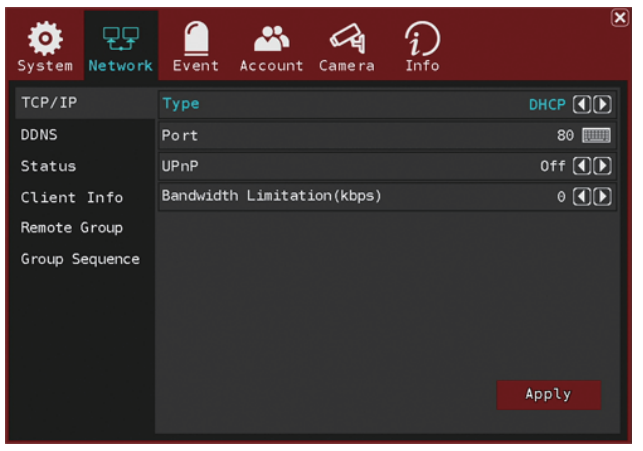

Figure 1.3. Network

- TCP/IP : select the type of network, Auto UPnP, DHCP and STATIC can be selected.
- DDNS : show the default address based on MAC address for network access. Use your own hostname after registration which can be possible by pressing the keyboard shape button. You can check the host name you want to use by pressing the Check button for confirmation form the DDNS server.
- Status : press the 'Test' button in order to check the current status of the network. It returns assigned internal IP address, external public IP address number, the results of network, UPnP, DDNS tests. It is very useful for the network installations.
- Client Info : display the client information who have been connected.
- Remote DVR : add, delete and modify the information of the remote DVR that you want to connect.

1.2.3. Account

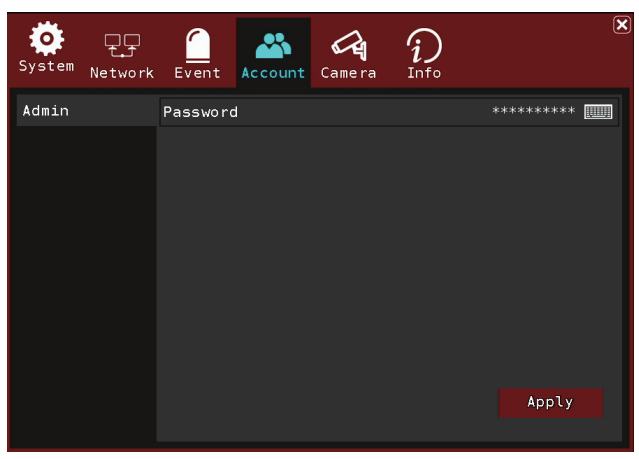

Figure 1.5. Account

Modify the password of administration account.

1.2.4. Info

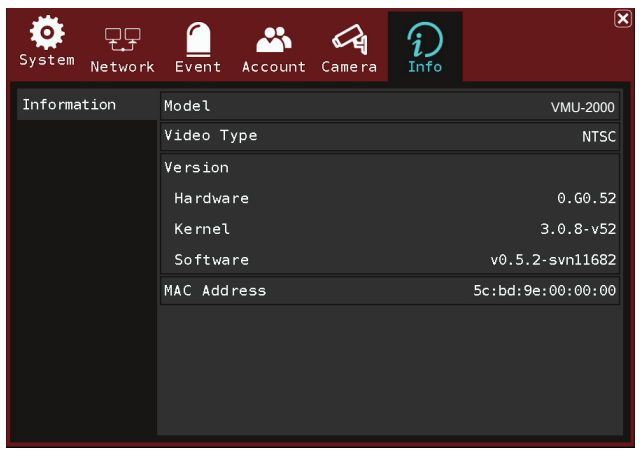

Figure 1.6. Info

Display the model name, video type, version information of the software and MAC address.